Model Documentation of the 'The Chemical Reactor Example'

1 Nomenclature

1.1 Nomenclature for Model Equations

x	state vector
u	control input vector
w	noise vector
z	regulated output vector
y	measurement vector

2 Model Equations

State Vector and Input Vector:

$$x \in \mathbb{R}^4 u \qquad \in \mathbb{R}^2 w \in \mathbb{R}^4 z \qquad \in \mathbb{R}^4 y \in \mathbb{R}^3$$

System Equations:

$$\dot{x}(t) = Ax(t) + B_1 w(t) + Bu(t) \tag{1a}$$
$$z(t) = C_1 x(t) + D_{11} w(t) + D12u(t) \tag{1b}$$
$$y(t) = Cx(t) + D21w(t) \tag{1c}$$

Outputs: z

2.1 Exemplary parameter values

Symbol	Value
A	$\begin{bmatrix} 1.38 & -0.2077 & 6.715 & -5.676 \\ -0.5814 & -4.29 & 0 & 0.675 \\ 1.067 & 4.273 & -6.654 & 5.893 \\ 0.048 & 4.273 & 1.343 & -2.104 \end{bmatrix}$
B	$\begin{bmatrix} 0 & 0 \\ 5.679 & 0 \\ 1.136 & -3.146 \\ 1.136 & 0 \end{bmatrix}$
B_1	$\begin{bmatrix} 0 & 0 \\ 5.679 & 0 \\ 1.136 & -3.146 \\ 1.136 & 0 \end{bmatrix}$
C_1	$\begin{bmatrix} 1.0 & 0 & 0 & 0 \\ 0 & 1.0 & 0 & 0 \\ 0 & 0 & 1.0 & 0 \\ 0 & 0 & 0 & 1.0 \end{bmatrix}$
C	$\begin{bmatrix} 1.0 & 0 & 1.0 & -1.0 \\ 0 & 1.0 & 0 & 0 \\ 0 & 0 & 1.0 & -1.0 \end{bmatrix}$
D_{11}	$\begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$
D_{12}	$\begin{bmatrix} 0 & 0 \\ 0 & 0 \\ 1.0 & 0 \\ 0 & 1.0 \end{bmatrix}$
D_{21}	$\begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$

3 Derivation and Explanation

This model is part of the "'COMPleib"' - library and wasautomatically imported into ACKREP.
The original description was:
REA1 The Chemical Reactor Example ehemals CHR2 Y. S. Hung and A. G. J. MacFarlane, "Multivariable feedback A quasi-classical approach", Springer-Verlag, "Lecture Notes in Control and Information Sciences", 1982

4 Simulation

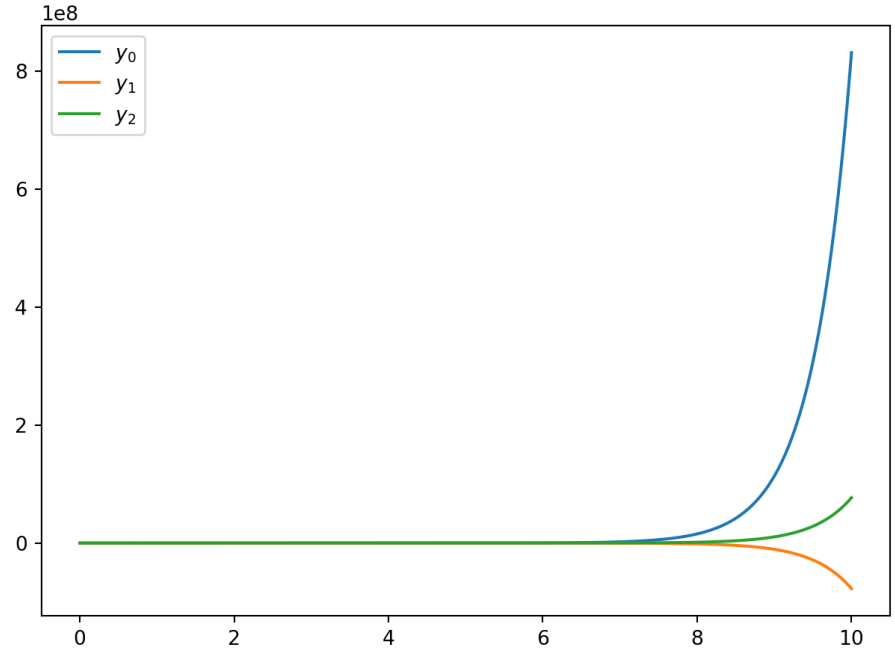

Figure 1: Simulation of the The Chemical Reactor Example.

References

[1] . S. Hung and A. G. J. MacFarlane, "Multivariable feedback A quasi-classical approach", Springer-Verlag, "Lecture Notes in Control and Information Sciences", 1982