

Model Documentation of the 'The Chemical Reactor Example'

1 Nomenclature

1.1 Nomenclature for Model Equations

- x state vector
- u control input vector
- w noise vector
- z regulated output vector
- y measurement vector

2 Model Equations

State Vector and Input Vector:

$$x \in \mathbb{R}^4 \quad u \in \mathbb{R}^2 \quad w \in \mathbb{R}^4 \quad z \in \mathbb{R}^4 \quad y \in \mathbb{R}^2$$

System Equations:

$$\dot{x}(t) = Ax(t) + B_1w(t) + Bu(t) \tag{1a}$$

$$z(t) = C_1x(t) + D_{11}w(t) + D_{12}u(t) \tag{1b}$$

$$y(t) = Cx(t) + D_{21}w(t) \tag{1c}$$

Outputs: z

2.1 Exemplary parameter values

Symbol	Value
A	$\begin{bmatrix} 1.4 & -0.208 & 6.715 & -5.676 \\ -0.581 & -4.29 & 0 & 0.675 \\ 1.067 & 4.273 & -6.654 & 5.893 \\ 0.048 & 4.273 & 1.343 & -2.104 \end{bmatrix}$
B	$\begin{bmatrix} 0 & 0 \\ 5.679 & 0 \\ 1.136 & -3.146 \\ 1.136 & 0 \end{bmatrix}$
B_1	$\begin{bmatrix} 0 & 0 \\ 5.679 & 0 \\ 1.136 & -3.146 \\ 1.136 & 0 \end{bmatrix}$
C_1	$\begin{bmatrix} 1.0 & 0 & 0 & 0 \\ 0 & 1.0 & 0 & 0 \\ 0 & 0 & 1.0 & 0 \\ 0 & 0 & 0 & 1.0 \end{bmatrix}$
C	$\begin{bmatrix} 1.0 & 0 & 1.0 & -1.0 \\ 0 & 1.0 & 0 & 0 \end{bmatrix}$
D_{11}	$\begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$
D_{12}	$\begin{bmatrix} 0 & 0 \\ 0 & 0 \\ 1.0 & 0 \\ 0 & 1.0 \end{bmatrix}$
D_{21}	$\begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$

3 Derivation and Explanation

This model is part of the "COMpleib" - library and was automatically imported into ACKREP.

The original description was:

REA2 Obtained from REA1 by leaving out the last row of the matrix C
 chemals
 CHR1

4 Simulation

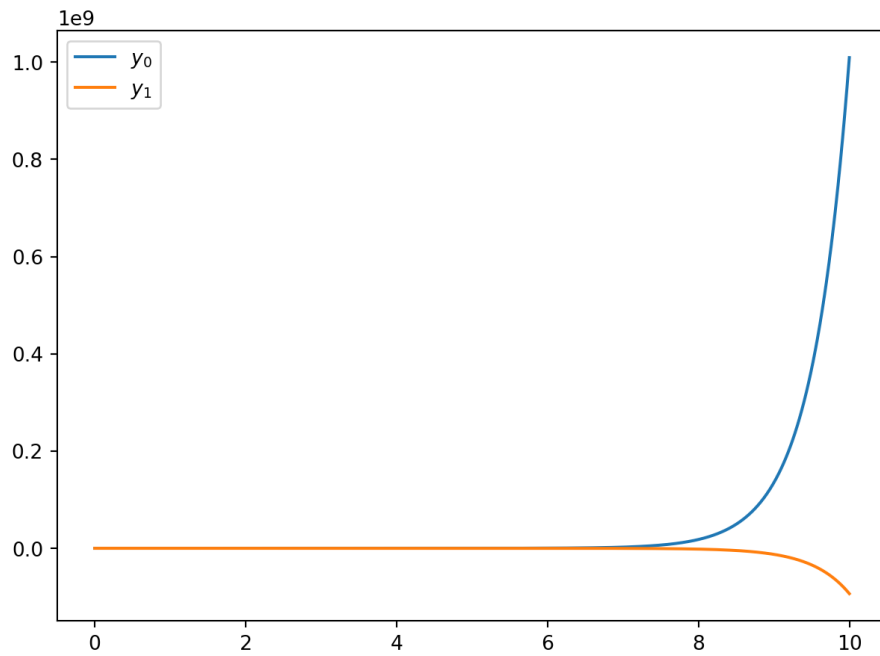


Figure 1: Simulation of the The Chemical Reactor Example.

References

- [1] . S. Hung and A. G. J. MacFarlane, "Multivariable feedback A quasi-classical approach", Springer-Verlag, "Lecture Notes in Control and Information Sciences", 1982